

High Refresh LED Display

XR-Series






Arc-shape Adjustable



Front/rear Maintenance




High-precision Structure




Quick Installation



Wide Viewing-angle




High Contrast Ratio

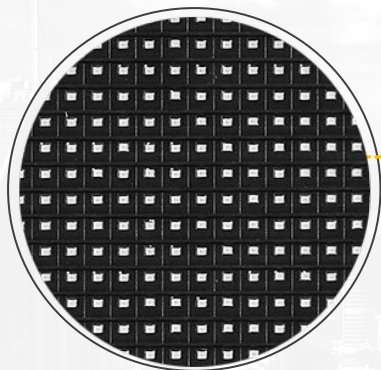

Front Viewing

Mask with special grain pattern processing for promoting contrast ratio.

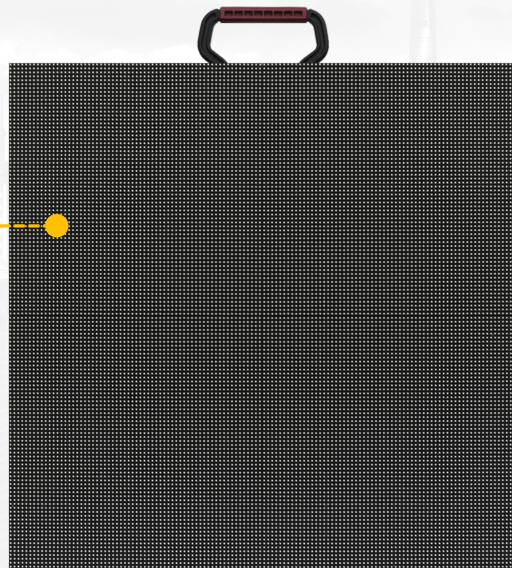




Cabinet Back

Light-weight, save transportation and installation cost;
Multi-handles, make installation easier;
Corner protection, protects LED in safe.

Dimension

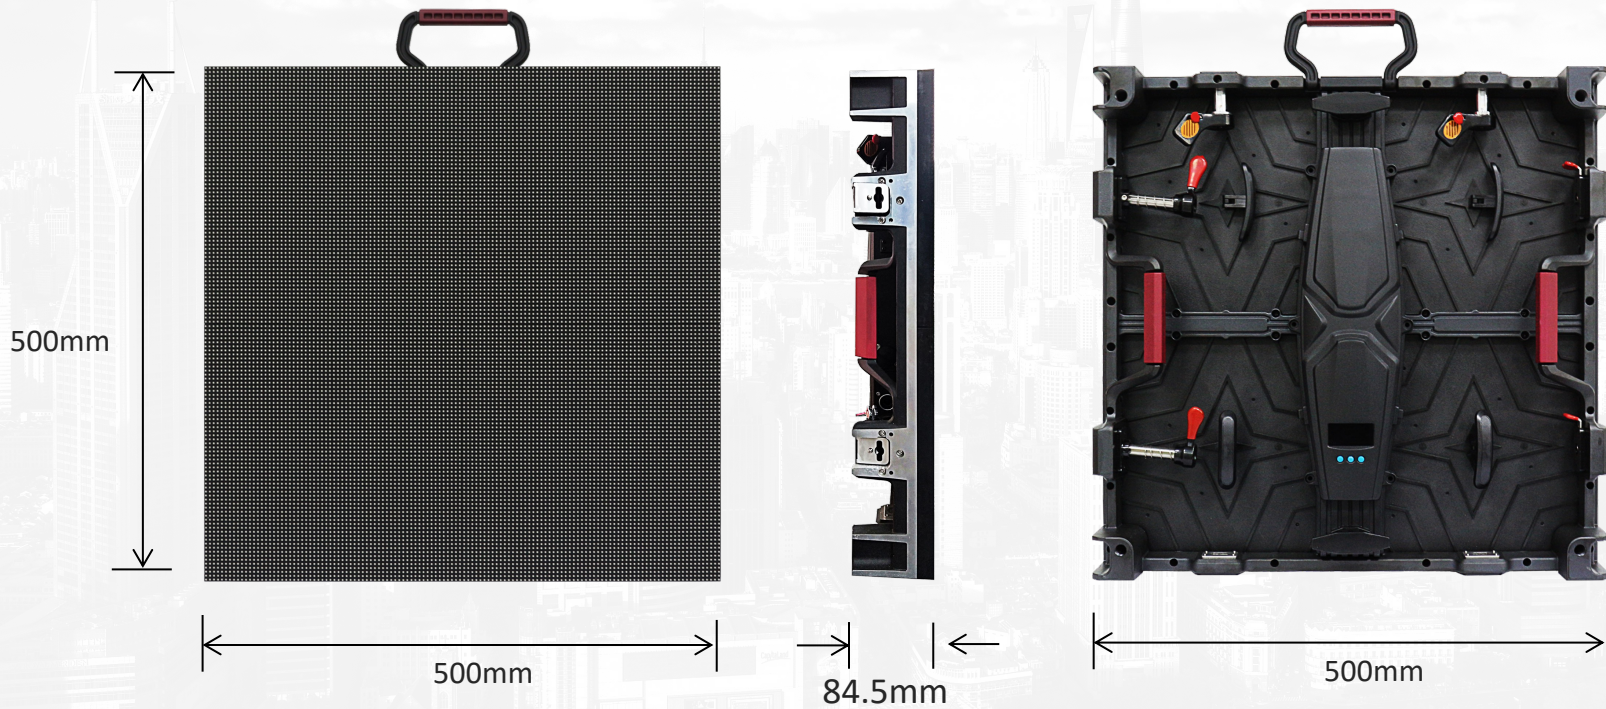

LEDSINO




Lighter & Thinner

500X500

8KG

Color Enhancement


Unique color enhancement technology ensures that each color is clearly visible, making the visual performance more realistic.

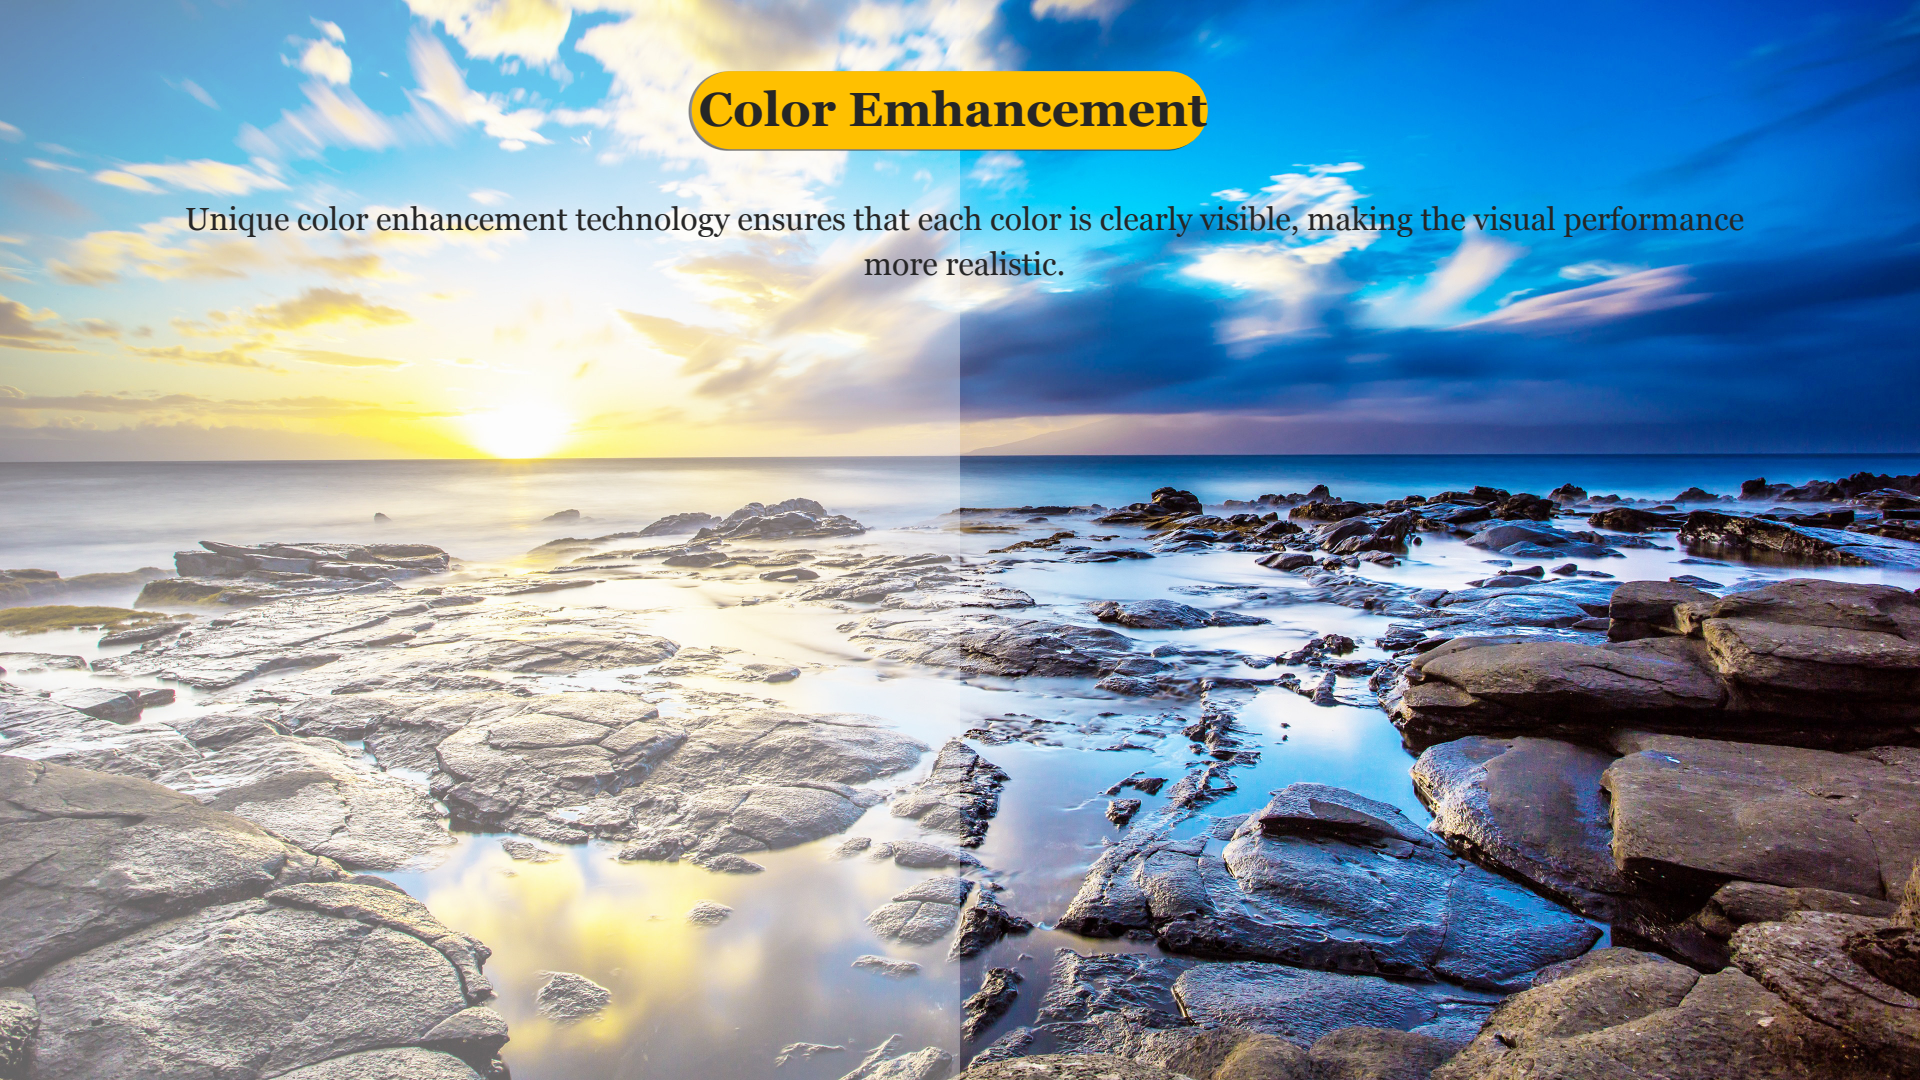

High Refresh Rate




High refresh rate

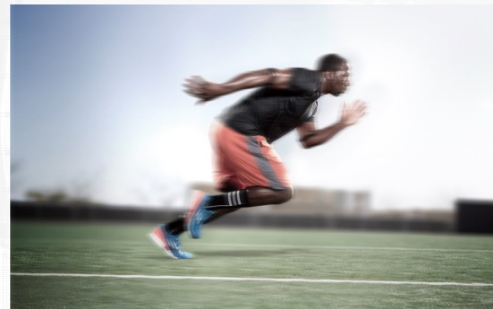


Low refresh rate

High Grey Scale

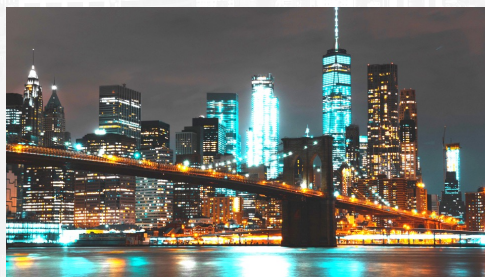

Hig grey scale

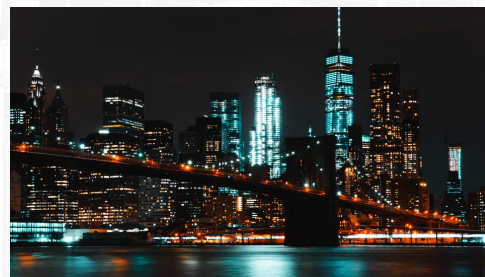

Low grey scale

LEDSINO

160° Super Wide Viewing Angle

Perfect presentation of images from any angle.



Seamless Splicing

Die-casting Aluminium Cabinet structure with
CNC high-precision processing;

(Flatness of Cabinet $\leq 0.1\text{mm}$)

HUB connection with high-integrated power box;

Plug&play, hot-swapping

Both front/rear side maintenance;

Buckle locks make the power box assembling & disassembling easier.




Variability Installation


As a professional led rental product, the convenience and variability of installation is one of the key points of your rental business. It can be assembled into most standardized sizes and installed in various ways, such as hanging installation, arc installation, stacking installation, etc.



Hanging

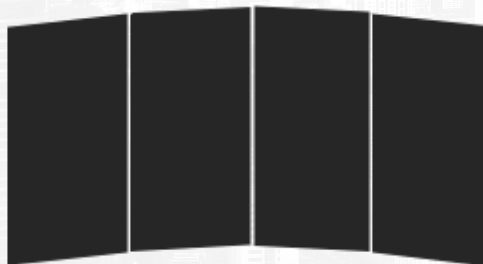

Arc-shapes

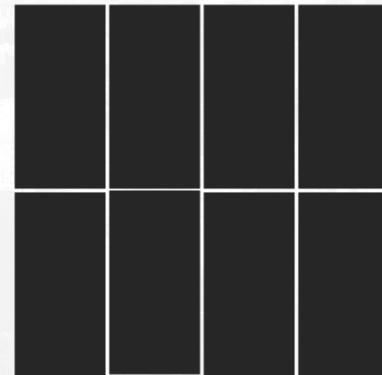

Stacking

Smart Monitoring LCD


Information system management platform

Temperature


Voltage

Total Time

Working time

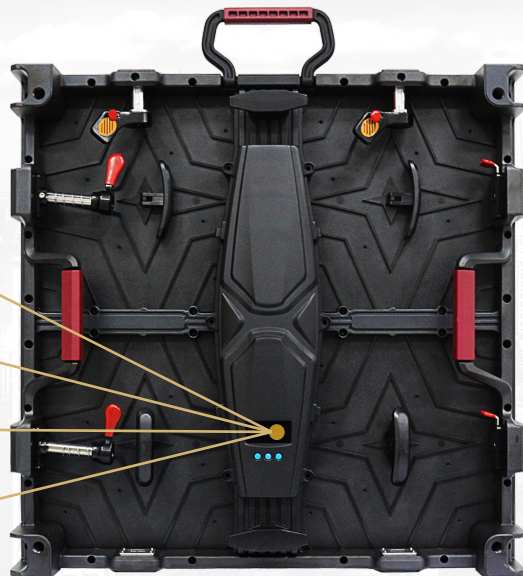

Cabinet Structure


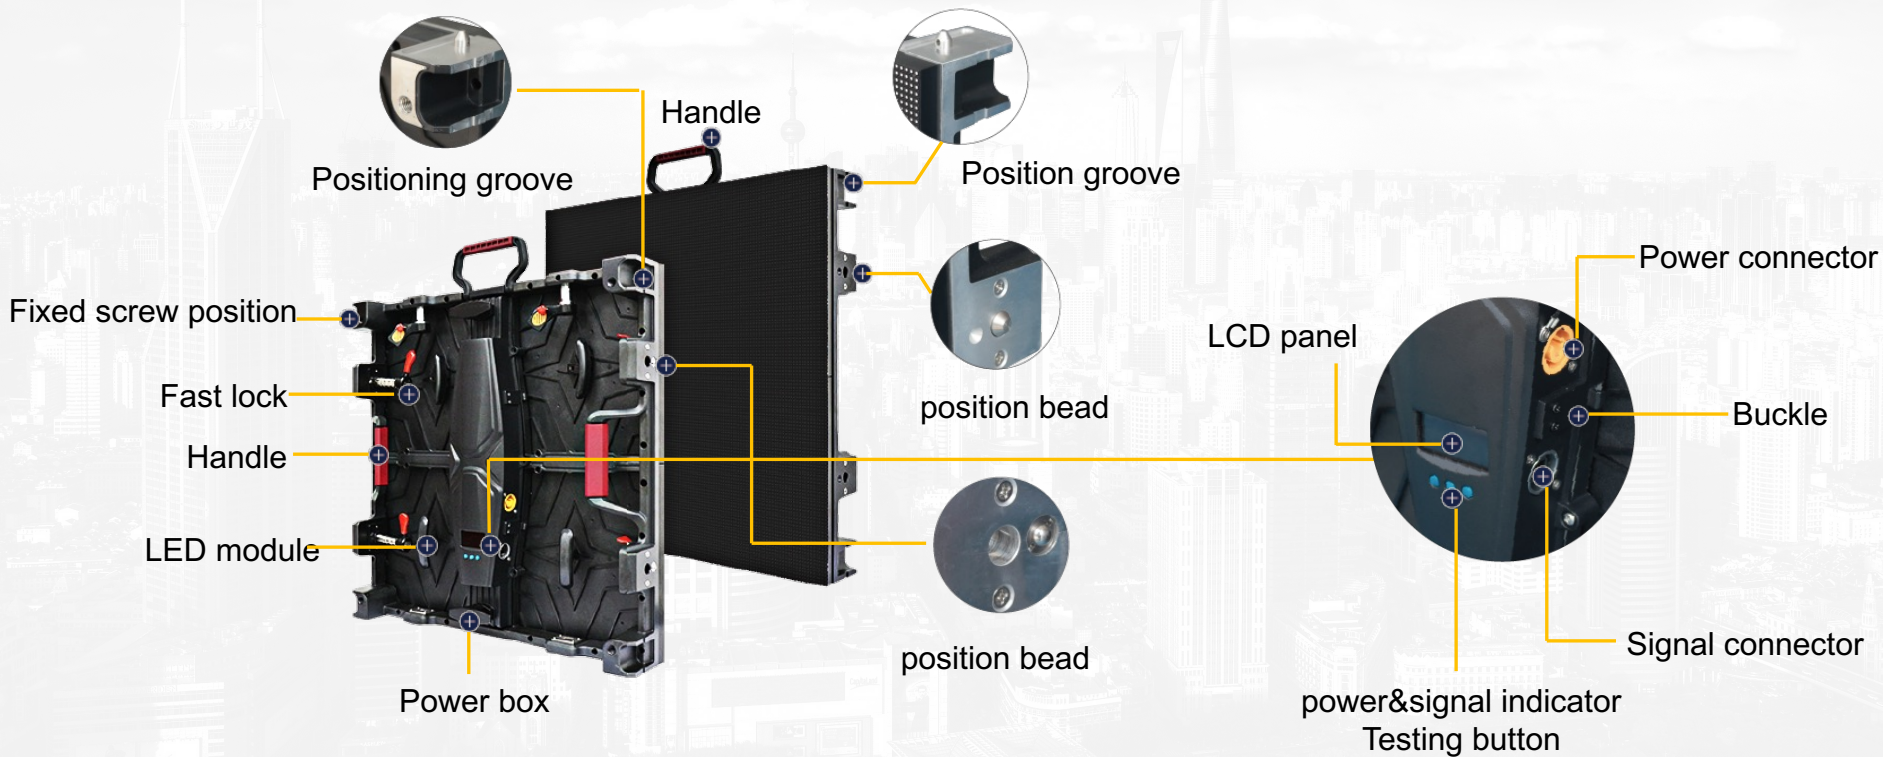


LED Type	SMD1515	SMD1515	SMD1515
Physical density(Dot/sqm)	262144	186624	147456
Module resolution	128X128	108X108	96X96
Module size(mm)	250X250	250X250	250X250
Cabinet size(mm)	500X500X84.5	500X500X84.5	500X500X84.5
Cabinet resolution	256X256	216X216	192X192
Module QTY(WXH)	2X2	2X2	2X2
Cabinet weight(kg)	8	8	8
Maintenance	Front/rear	Front/rear	Front/rear
Cabinet material	Die-casting Aluminum	Die-casting Aluminum	Die-casting Aluminum
Brightness(Nits)	≥1500	≥1500	≥1500
Color temperature(K)	1000-18500 Adjustable	1000-18500 Adjustable	1000-18500 Adjustable
Viewing angle(V/H)	160°/160°	160°/160°	160°/160°
Viewing distance	2-50m	3-50m	3-50m
Contrast ratio	10000 : 1	10000 : 1	10000 : 1
Frame frequency	60/120	60/120	60/120
Drive mode	1/8	1/25	1/8
Grey level	16bit	16bit	16bit
Refresh rate(Hz)	7680	7680	7680
Max. power consumption(W/sqm.)	920	920	920
Avg. power consumption(W/sqm)	200-300	200-300	200-300
Protection level	IP31	IP31	IP31
Power input		AC90-264V,47-63Hz	
Working temperature/humidity(°C/RH)		-20~60°C/10%~85%	
Storage temperature/humidity(°C/RH)		-20~60°C/10%~85%	
Certification		CCC/CE/RoHS/FCC/CB/TUV/IEC	

Applications



Applications

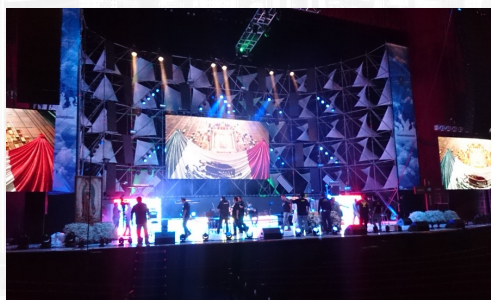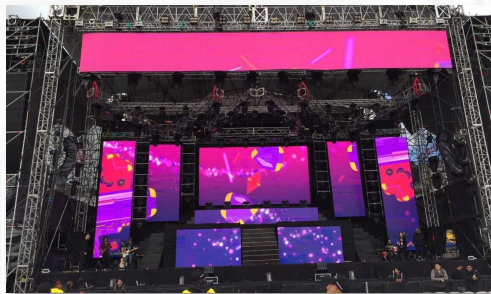

The logo for LEDSINO, featuring the word "LEDSINO" in a bold, blue, sans-serif font. The letter "D" is stylized with a blue circular graphic element inside it. In the top left corner, there are two overlapping circles, one yellow and one pink.

THANKS



SHENZHEN LEDSINO OPTOELECTRONIC CO., LTD.

Web: www.ledsino.com

Tel: 0086-13421345624; Email: manager@ledsino.com

Add: Building D, Hongfa Science Park, 2035 Songbai Road, Shiyan, Bao'an District, Shenzhen, Guangdong, China.